

# TECHNICAL DATA SHEET – TOPWELL 27 STANDARD




The foundation of TOPWELL 27mm STANDARD are 27mm wide aluminium sections, connected by a stainless steel wire and separated by rubber rings, making it possible to roll the mat for better handling when cleaning. The aluminium profiles are fixed with grooved PVC strips or textile strips.

Fillings can be combined at will and replaced when worn out.


Non-flammable type  
TOPWELL 27mm STANDARD mat with a non-flammable rubber filling may be used for emergency exits and is certified to EN 13501-1+A1:2010.

Reaction to fire: Bfl-s1



grooved PVC

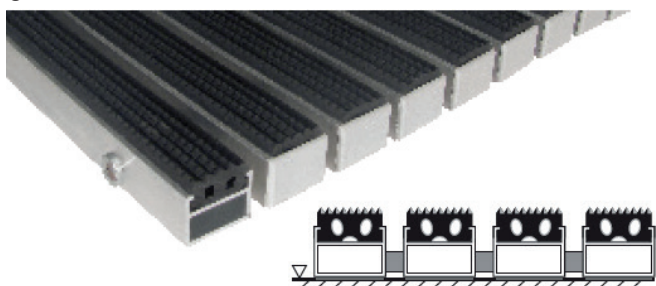

textile

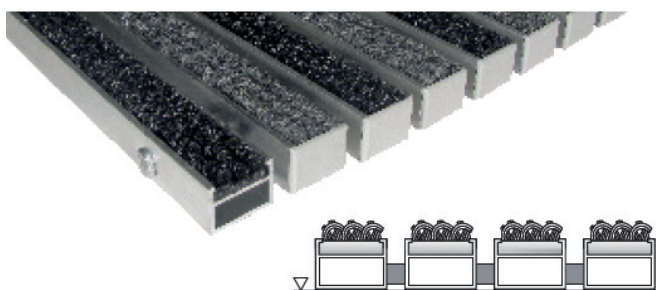

grooved PVC/textile

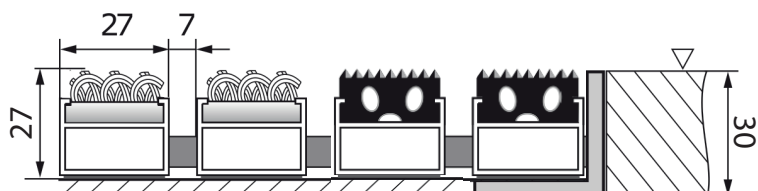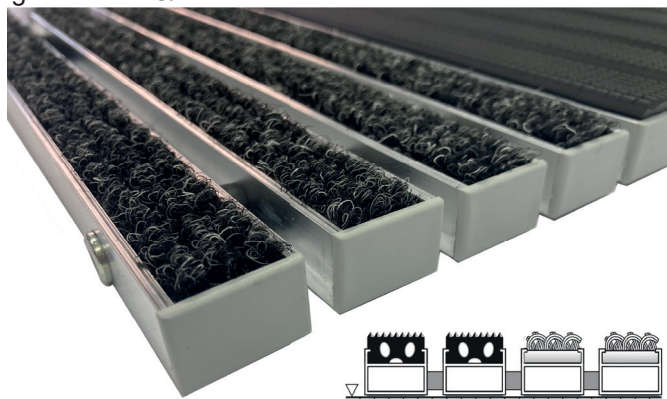

## Technical data

**Design:** grooved PVC, textile stripes, alternating grooved PVC/textile

**Dimensions:** according to the client's requirements

**Height:** 27 mm

**Weight:** grooved PVC version - 18 kg/m<sup>2</sup>  
textile version - 15 kg/m<sup>2</sup>

**Installation:** at floor level in L-frame 30 × 30 × 3 mm or freely placed on the floor with aluminium tapered frame - width of 45mm (up to 120cm) or 65mm

**Resistance:** maximum load 8.5 t/100 cm<sup>2</sup>

**Use:** entrances to shopping centres and department stores with high traffic, entrances to hotels, banks and restaurants